

Decor
series

600 X 1200 MM



Richness
Of
Charm



Decor
series

Decor
series




Decan Blue

Carving |   HD 

Vendetta Blue

R-6

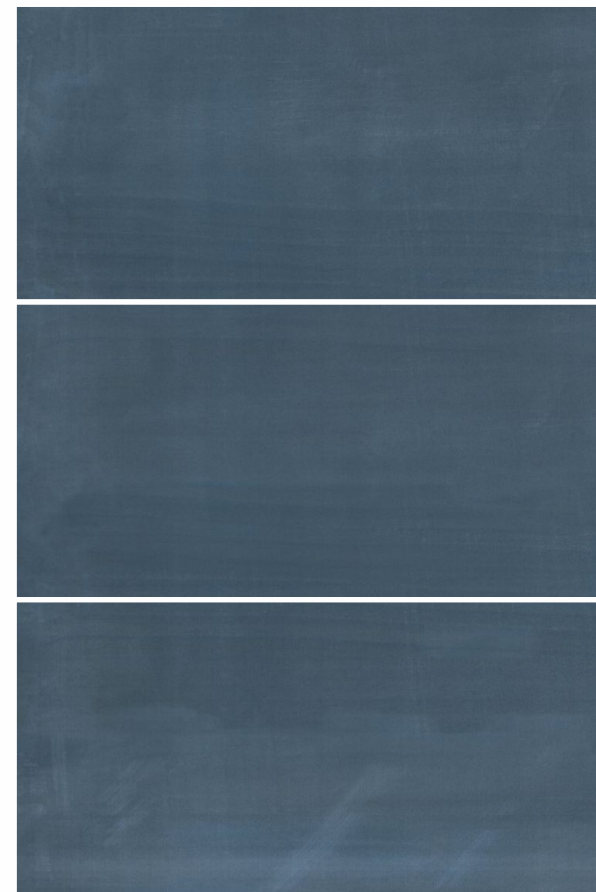

600x1200mm / Matt






Decan Rustin Bronze

Carving |   HD 

Rustin Bronze

R-6

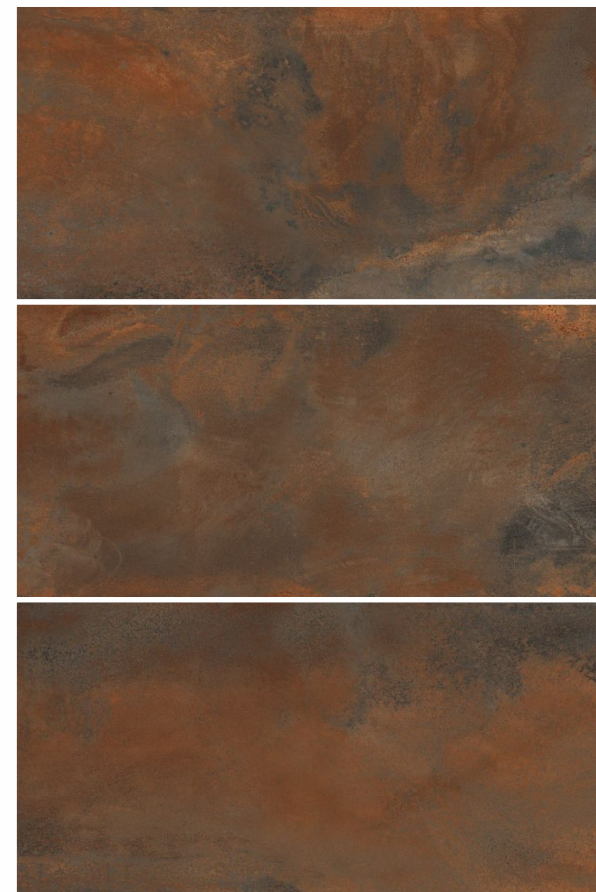

600x1200mm / Matt






Decan Rustin Silver

Carving |   HD 

Rustin Silver

R-6

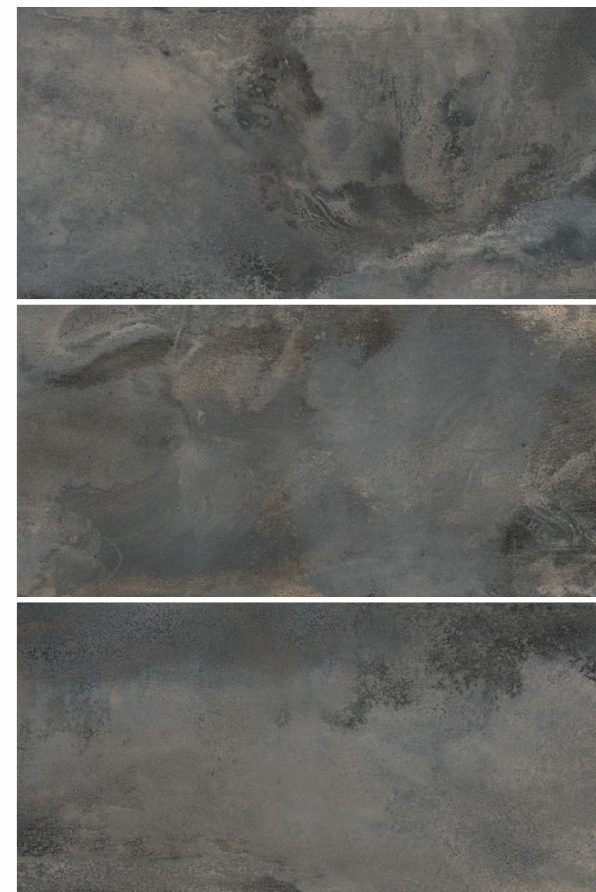

600x1200mm / Matt





Ethnic Lavasa Decor

Carving |   HD 



Lavasa Bianco

R-6



600x1200mm / Matt




Ethnic Lavasa Decor


Carving |   HD 

Lavasa Black

Ⓡ-4

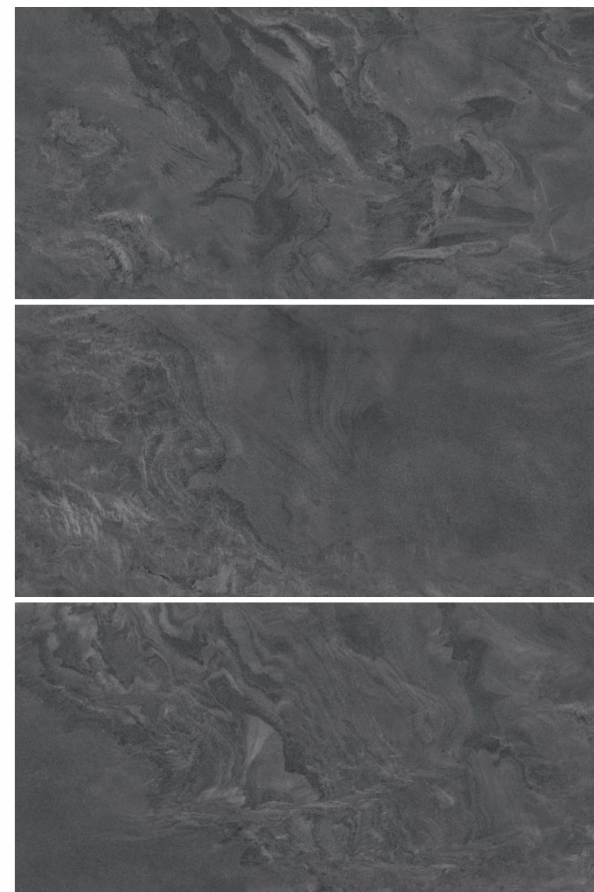

600x1200mm / Matt

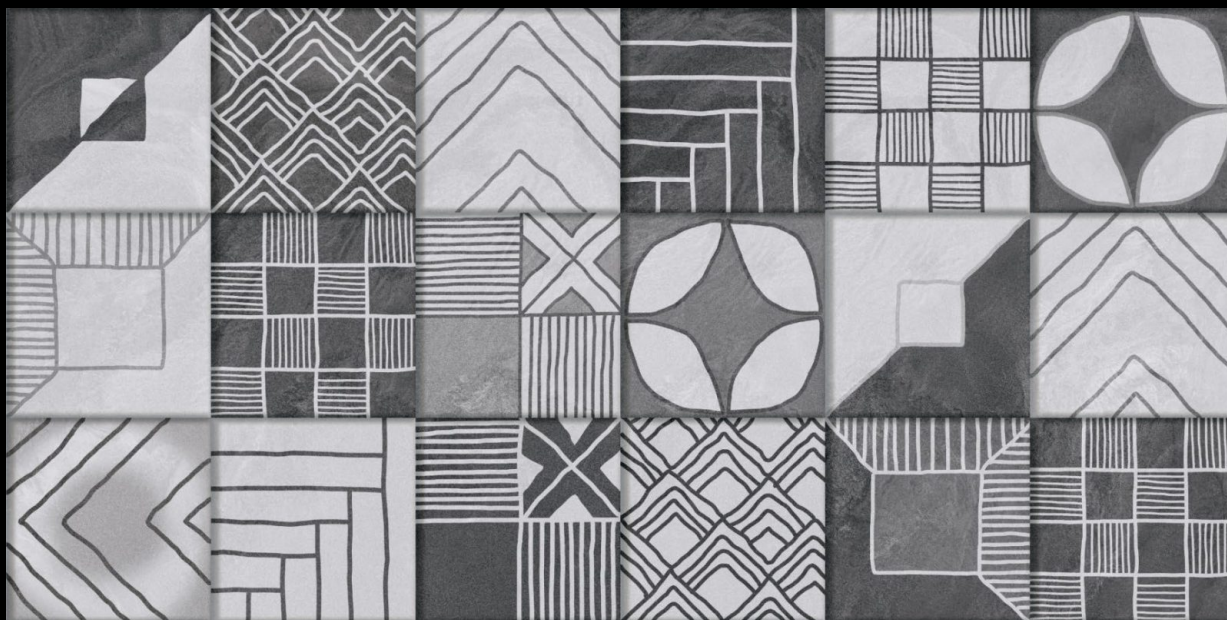



Italo Beige Decor

Carving |   HD 

Italo Beige

R-5



600x1200mm / Matt





Italo Blue Decor

Carving |    

Italo Blue

(R-5)



600x1200mm / Matt



Moroccan Martin Brown Decor

Carving |   HD 

Martin Brown

R-6



600x1200mm / Matt





Moroccan Martin Brown Decor

Carving |   HD 

Martin Ivory

R-6



600x1200mm / Matt






Moroccan Martin Coffee Decor

Carving |   HD 

Martin Coffee

R-6

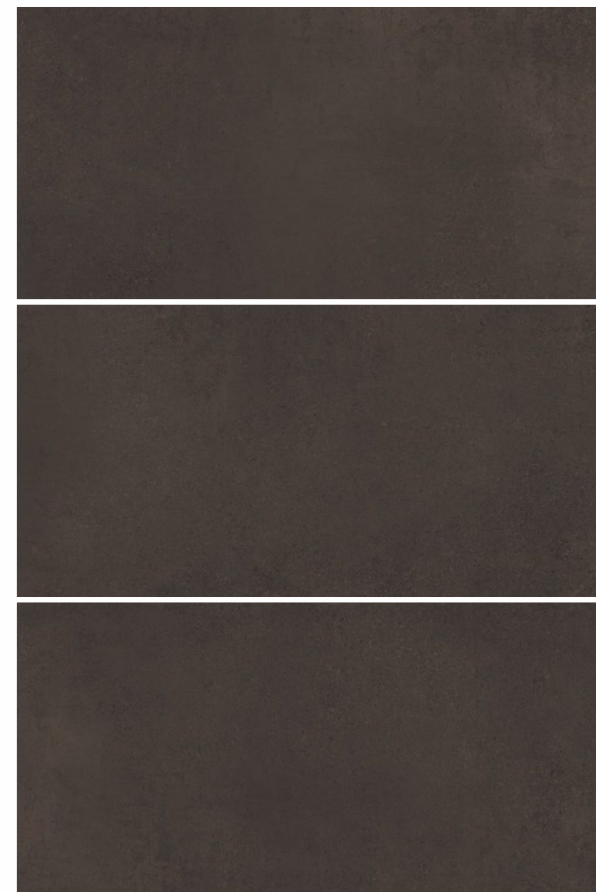

600x1200mm / Matt





Moroccan Martin Coffee Decor

Carving |   HD 

Martin Ivory

R-6



600x1200mm / Matt






Royal Vendetta Decor

Carving |   HD 

Vendetta Blue

R-6

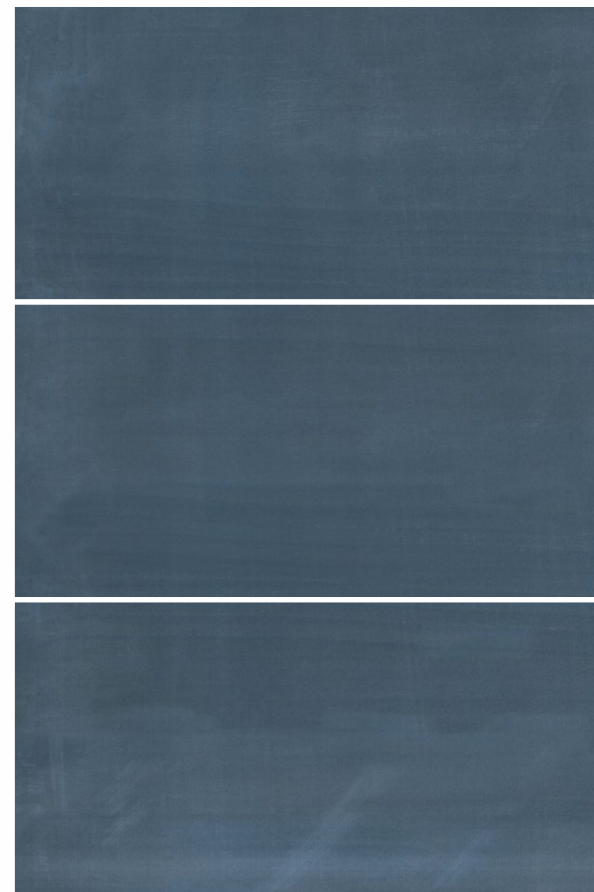

600x1200mm / Matt






Royal Vendetta Decor

Carving |   HD 

Vendetta Silver

R-6

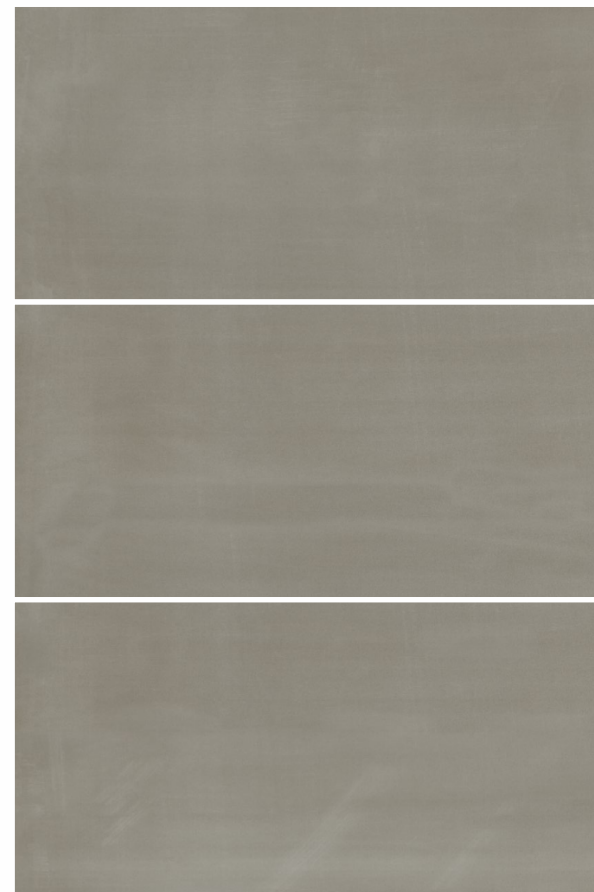

600x1200mm / Matt





Sargo Grey Decor


Carving |   HD 


Sargo Grey

(R-3)



600x1200mm / Matt

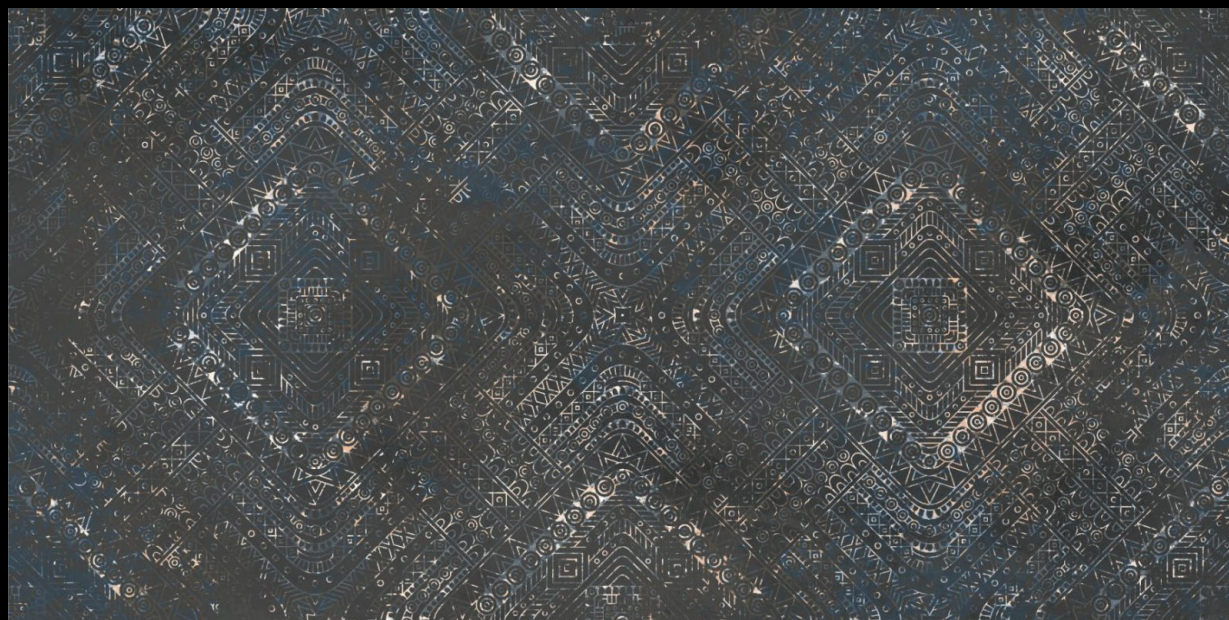

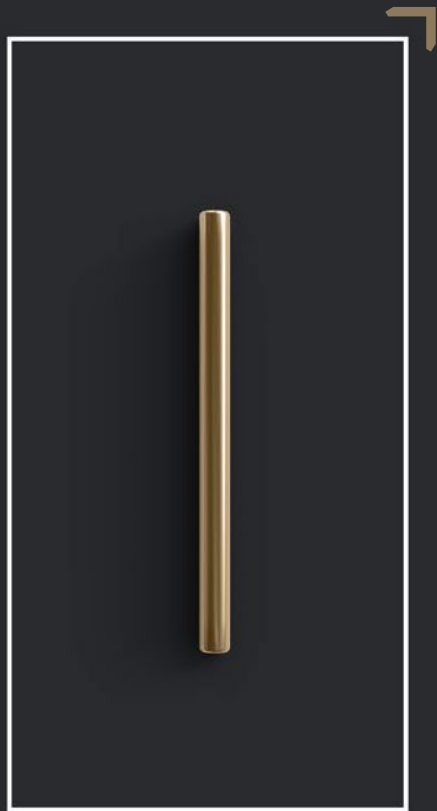

TERAZZO

The Beauty that nourishes the soul.






Charcoal Taro



Charcoal Taro

(R-1)

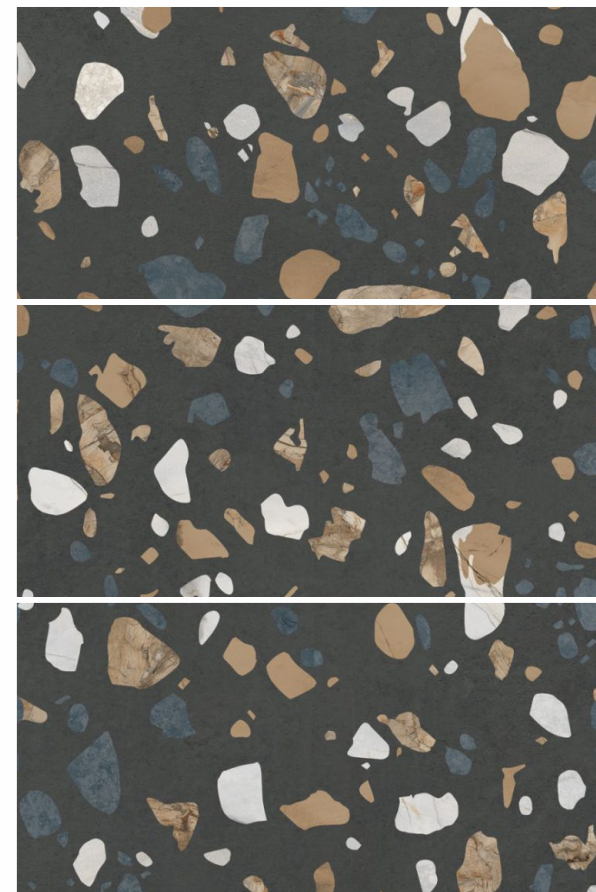

600x1200mm / Carving






Terina Beige



Terina Beige

R-2

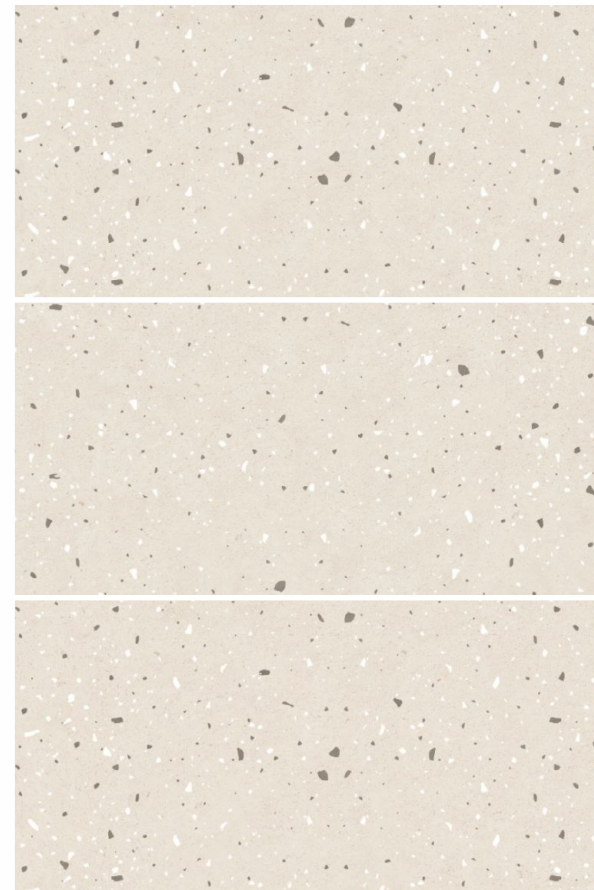

600x1200mm / Carving




Terina Grey




Terina Grey

R-2

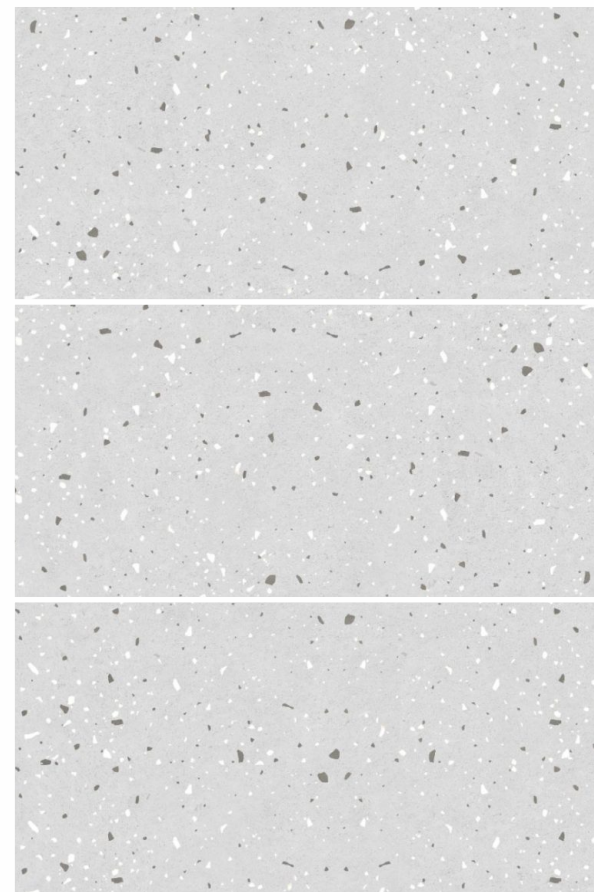

600x1200mm / Carving

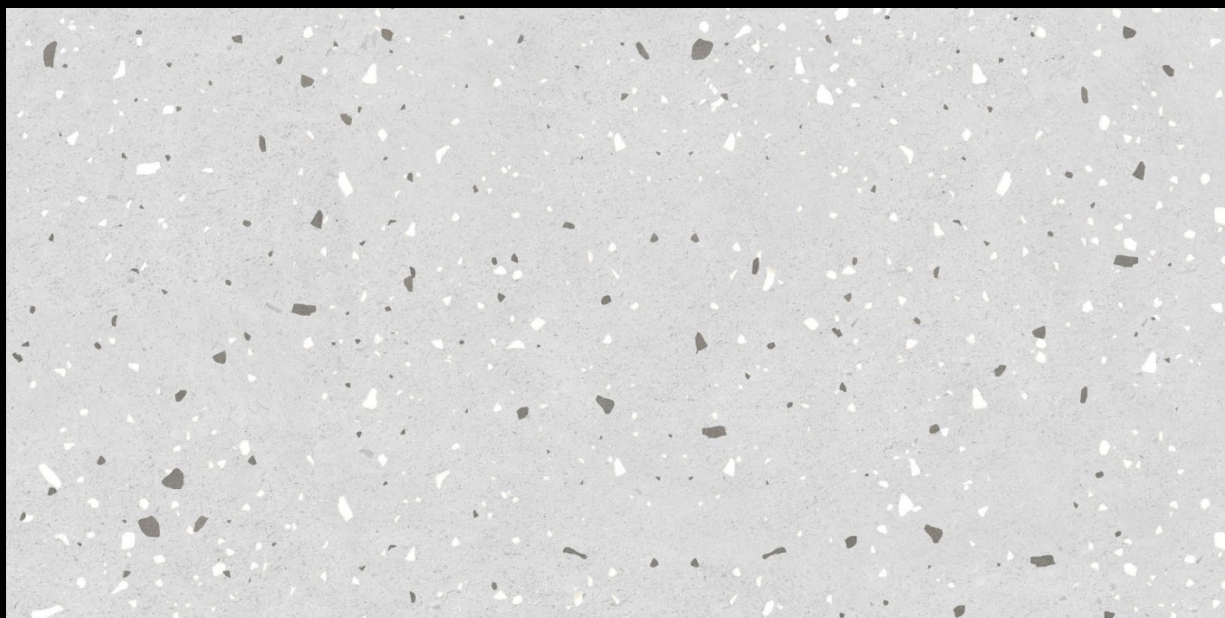



Terza Beige



Terza Beige

R-3



600x1200mm / Carving



Terza Stone



Terza Stone

R-3




600x1200mm / Carving



Trion Silver



Trion Silver

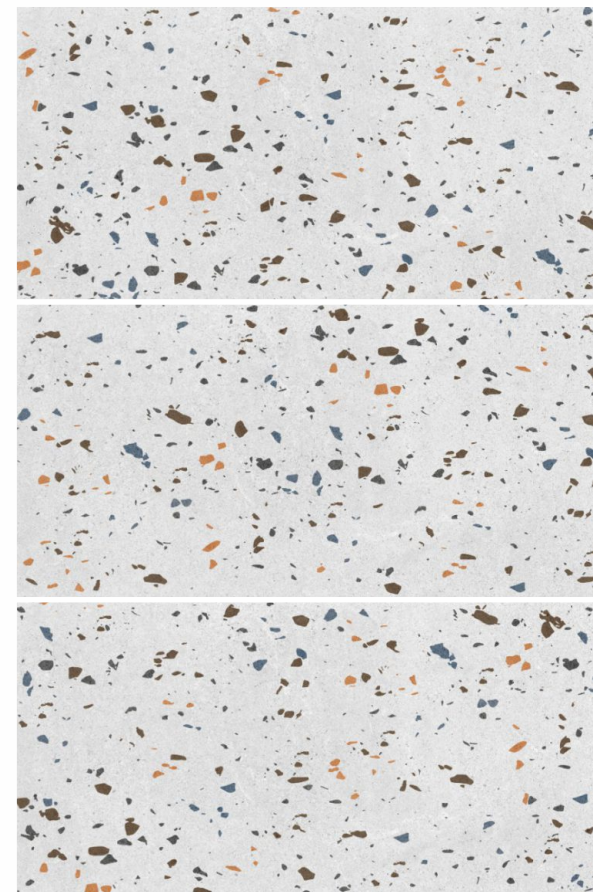

600x1200mm / Carving

GVT/ PGVT SPECIFICATIONS

Test Description	Test Method	ISO 13006:2018 / EN 14411 Group B1a Requirement	Indian Standard IS 15622:2017 Group B1a Requirement	Value (Polished)	Value (Matt)
Length & Width	ISO 10545-2 / IS 13630-1	± 0.3% or ±1.0mm	± 0.1 %	± 0.1%	± 0.1%
Thicness	ISO 10545-2 / IS 13630-1	± 5% or ± 0.5mm	± 5 %	± 4%	± 4%
Straightness of Sides	ISO 10545-2 / IS 13630-1	± 0.3% or ±0.8mm	± 0.1 %	± 0.1%	± 0.1%
Retangularity	ISO 10545-2 / IS 13630-1	± 0.3% or ± 1.5mm	± 0.1 %	± 0.1 %	± 0.1 %
Surface Flatness	ISO 10545-2 / IS 13630-1	± 0.4% or ±1.8mm	± 0.5 %	± 0.15%	± 0.15%
Surface Quality	ISO 10545-2 / IS 13630-1	Min 95% free from visible defects	Min 95% free from visible defects	>95% free from visible defects	>95% free from visible defects
Water Absorption	ISO 10545-3/ IS 13630- 2	≤ 0.5% , individual Max 0.6% .	Avaerage ≤0.08% , Individual 0.1% , Max	≤ 0.05%	≤ 0.05%
Breaking Strength	ISO 10545-4 / IS 13630-6	700 N Min for thickness < 7.5 mm, 1300 Min for thickness ≥ 7.5 mm	700 N Min for thickness < 7.5 mm, 1300 Min for thickness ≥ 7.5 mm	≥ 1500 N	≥ 1500 N
Moisture Expansion	ISO 10545-10 / IS 13630-3	report value	0.02 mm/ m, Max	≤ 0.02 mm/ m	≤ 0.02 mm/ m
Modulus of Repture	ISO 10545-4/ IS 13630-6	≥ 35 N/mm ² , Individual 32 N/mm ² , Min	Average 35 N/mm ² , Individual 32 N/mm ² , Min	≥ 38 N/mm2	≥ 38 N/mm2
Resistance to Surface Abrasion	ISO 10545-7 / IS 13630 -11	report abrasion class & Cycle passec	Class II , Min	PEI II - III	PEI III-V
Linear Thermal Expantion	ISO 10545-8/ IS 13630-4	report value	Max, 6x10 ⁻⁶ K ⁻¹	≤ 6x10 ⁻⁶ K ⁻¹	≤ 6x10 ⁻⁶ K ⁻¹
Thermal Stock Resistance	ISO 10545-9 / IS 13630 -5	report result	10 cycles Min	No Damage	No Damage
Frost Resistance	ISO 10545-12 / IS 13630-10	report result	required if requested by purchaser	No Damage	No Damage
Resistance to Chemicals	ISO 10545-13 / IS 13630-8	GB	AA min	GA/ AA	GA/ AA
Resistance to Stains	ISO 10545-14 / IS 13630-8	Min Class 3	Class I, Min	Class3(ISO) / Class1(BIS)	Class3(ISO) / Class1(BIS)
Color Resistance	ISO 10545-16	Report result	-	No change in color	No change in color
Color Resistance to UV Light	DIN 51094	Report result	-	No change in color	No change in color
Scratch Hardness (MOH's Scale)	IS 13630 -13	Not Required	5, Min	≥ 5	≥ 6

DIMENSION	PIECES	COVERAGE
600 X 1200 MM	2	1.44 sq. mtr.

DISCLAIMER : We tiles reserve the right to deleted and amend either totally or partially, any of the colors, shape, sizes, references and other technical specification contained in this catalogue at anytime. The colors shown of tiles in this catalogue are purely illustrative and limited to printing process. Please refer actual sample before final selection. The details of sizes, colors, references should be verified for typographical errors.

ONE CERA

☎ +91 - 90230 44949 ✉ info@onecera.in 🌐 www.onecera.in

📍 1211, The Spire 2, 150 Feet Ring Road, Nr. Sheetal Park, Rajkot-360005